

Installation drawing

主要技术参数 Main Specifications

- 线 数 (Poles): 01 to 03P
- 接触电阻 (Contact resistance): $\leq 20m\Omega$
- 绝缘电阻 (Insulation resistance): $\geq 800M\Omega$
- 额定电压 (Rated voltage): 250V AC DC
- 额定电流 (Rated current): 9.0A AC DC
- 耐 电压 (Withstand Voltage): 800V AC/minute
- 温度范围 (Temperature Range): $-25^{\circ}C \sim +105^{\circ}C$

ORDER INFORMATION:


L001-03-F1CB-R

PART No. _____
 No. OF CIRCUITS: _____
 03
 PLASTIC MATERIAL: _____
 F1C=LCP (BEIGE)

PACKAGING:
 R=REEL
 P=PE
 PLATING:
 B=MATTE Sn

ITEM	COMPONENT	Q'TY	MATERIAL	FINISH
B	CONTACT	3 PCS	PhosphorBronze	MATTE Sn-plated
A	PEDESTAL	1 PCS	LCP	UL 94V-0, COLOR:BEIGE

UNITS mm		mstconn 深圳市德瑞电子有限公司 SHENZHEN DERUI ELECTRONIC CO.,LTD.	
MAT'L		PART NO.(INTENDED USE) L001-03-F1CB-R	TITLE: 4.0mmPITCH 90°WAFER SMT TYPE
FINISH		APPD:	DWG NO.:
Q'TY		CHKD:	
DR: HU 2016.09.28		SCALE	SHEET
X.± 0.3	X°.± 5°	1/1	1/1
.X± 0.25	.X°.± 2°		REV. A
.XX± 0.20	.XX°.± 1°		
.XXX± 0.10	.XXX°.± 0.5°		

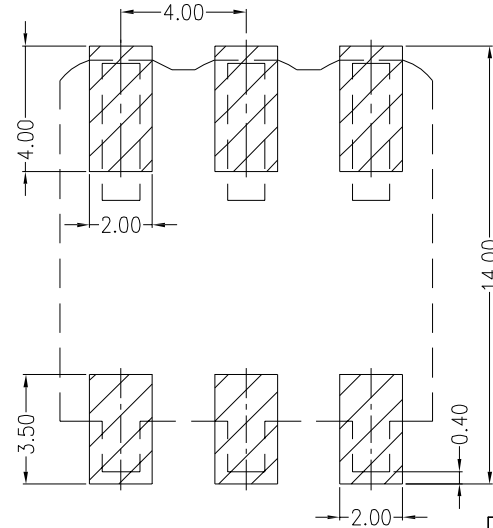

Board Layout

