





APPLICABLE FPC/FFC
(THICKNESS 0.3±0.03)



NOTES:

- 1.HUOSINGT: HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BEIGE
- 2.ACTUATOR: HIGH-TEMP THERMOPLASTIC UL94V-0 COLOR:BLACK
- 3.TERMINAL:PHOSPHOR BRONZE
PLATING:GOLD FLASH OR MATTE-TIN OR TIN (LEAD FREE)
- 4.FITTING NAIL:BRASS
PLATING:MATTE-TIN OR TIN (LEAD FREE)

Dimensions

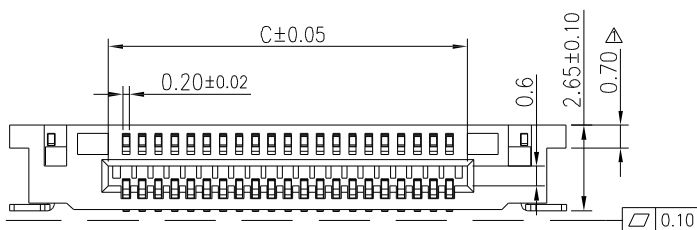

CABLE INSERT DIM.

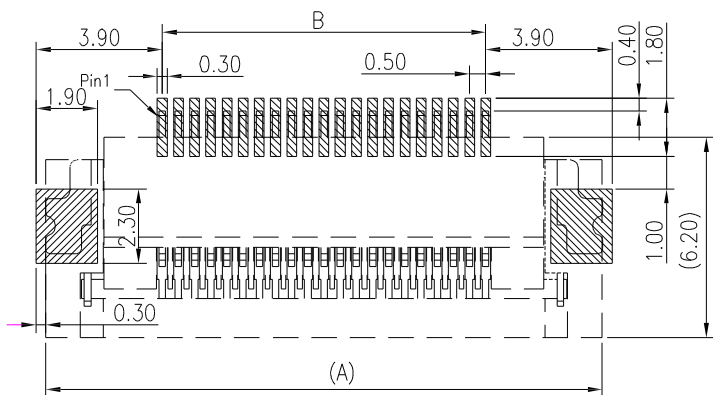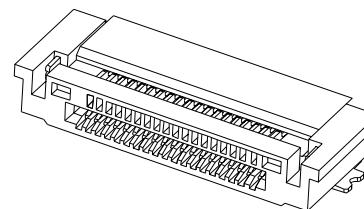

RECOMMENDED PCB PATTERN DIM.

TOLERANCE : ±0.05

UNITS	mm
MAT'L	
FINISH	
Q'TY	PCS

mstconn

深圳市德瑞电子有限公司
SHENZHEN DERUI ELECTRONIC CO., LTD.

PART NO.(INTENDED USE)
05265-GX-nPWB


TITLE:
0.5前插后掀盖大锁扣 H2.65

APPD:

DWG NO.:
05265-GX-nPWB

CHKD:

DR: HU 2016.09.28



SCALE	SHEET	REV.
1/1	1/1	A