
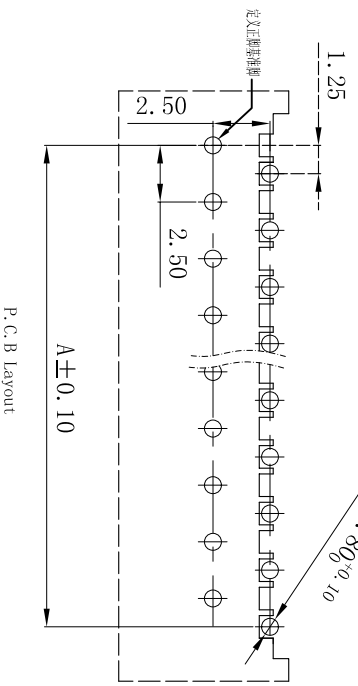
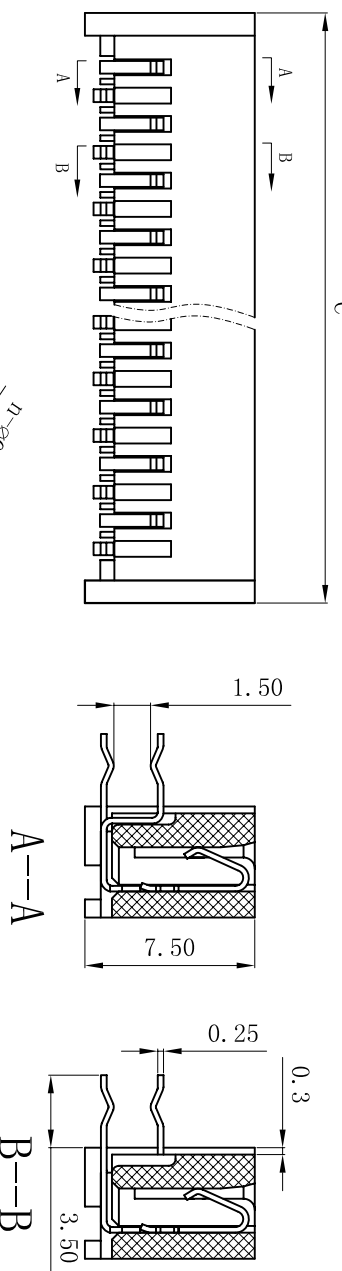


# PITCH 1.25mm FPC CONNECTORS

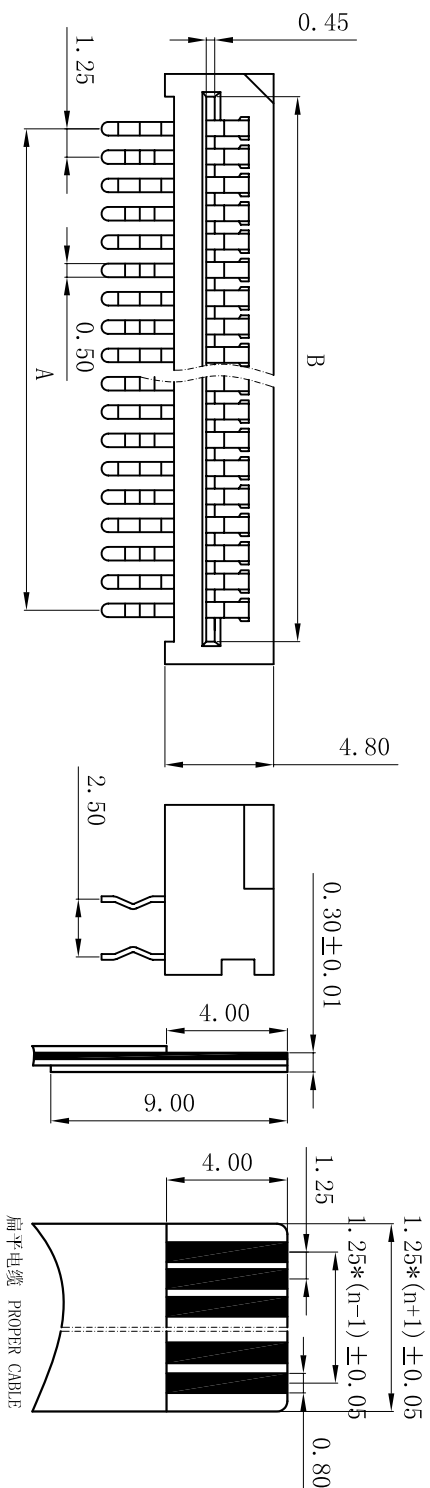

性能:  
 额定电流: 1A  
 额定电压: 200V  
 耐电压: 500V  
 接触电阻: <math>\le 20m\Omega</math>  
 绝缘电阻: 500M $\Omega$   
 工作温度: -20 $^{\circ}C$ ~+85 $^{\circ}C$   
 塑件 (材质): PBT, UL94V-0  
 插簧 (材质): 磷青铜, 镀锡, 镀金

孔位	A	B	C
4	3.75	6.25	8.55
5	5.00	7.50	9.80
6	6.25	8.75	11.05
7	7.50	10.00	12.30
8	8.75	11.25	13.55
9	10.00	12.50	14.80
10	11.25	13.75	16.05
11	12.50	15.00	17.30
12	13.75	16.25	18.55
13	15.00	17.50	19.80
14	16.25	18.75	21.05
15	17.50	20.00	22.30
16	18.75	21.25	23.55
17	20.00	22.50	24.80
18	21.25	23.75	26.05
19	22.50	25.00	27.30
20	23.75	26.25	28.55
21	25.00	27.50	29.80
22	26.25	28.75	31.05
23	27.50	30.00	32.30
24	28.75	31.25	33.55
25	30.00	32.50	34.80
26	31.25	33.75	36.05
27	32.50	35.00	37.30
28	33.75	36.25	38.55
29	35.00	37.50	39.80
30	36.25	38.75	41.05
31	37.50	40.00	42.30
32	38.75	41.25	43.55
33	40.00	42.50	44.80
34	41.25	43.75	46.05
35	42.50	45.00	47.30
36	43.75	46.25	48.55
37	45.00	47.50	49.80
38	46.25	48.75	51.05
39	47.50	50.00	52.30
40	48.75	51.25	53.55

X ± 0.3	X° ± 5°	UNITS	mm
.X ± 0.25	.X° ± 2°	MAT'L	
.XX ± 0.20	.XX° ± 1°	FINISH	
.XXX ± 0.10	.XXX° ± 0.5°	Q'TY	

NAME (INTENDED USE)	1.25mm FPC(弯插)弯插(正脚)
PART NO. (INTENDED USE)	1.25-n-pin
APDR:	
CHKD:	
DWG NO.:	125N03-AUH00000000
DRE:	YLZ 2011.09.28

TITLE:		1.25mm FPC (A型) 弯插(正脚)	
MSTCONN		SHEN ZHEN DE RUI ELECTRONIC CO., LTD	
SCALE	1/1	SHEET	1/1
REV.			

1	2	3	4	5	6	7	8	9
---	---	---	---	---	---	---	---	---