


**RECOMMEND P.C.B LAYOUT**  
(TOLERANCES ±0.10mm)

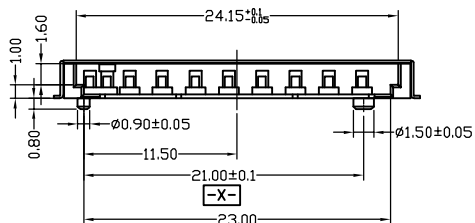

**NOTE:**

**1.MATERIAL:**


- 1.1 PLASTIC:HIGH TEMPERATURE PLASTIC UL94V-0
- 1.2 CONTACT:C5191-H T=0.20mm
- 1.3 SHELL:C2680-H T=0.20mm

**2.PLATING OF CONTACT:**

- 2.1 UNDER PLATING:50u"MIN NICKEL OVER ALL
- 2.2 CONTACT AREA:GOLD FLASH PLATED
- 2.3 SOLDERING AREA:50u"MIN MATTE TIN PLATED

**3.PART MUST COMPLY RoHS SPECIFICATION**

**CIRCUIT:**

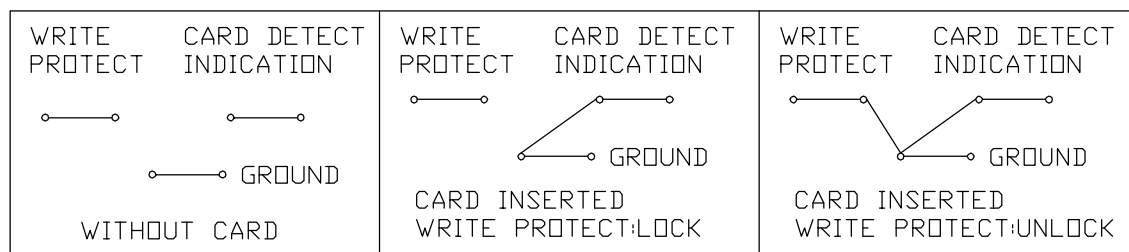

符合RoHS环保要求

UNITS mm	<b>mstconn</b> 深圳市德瑞电子有限公司 SHENZHEN DERUI ELECTRONIC CO., LTD.								
MAT'L	PART NO.(INTENDED USE) SD-03-1	TITLE: SD简易长体卡座带压片							
FINISH	APPD:	DWG NO.: SD-03-1							
Q'TY PCS	CHKD: DR: HU 2016.09.28		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td>SCALE</td> <td>SHEET</td> <td>REV.</td> </tr> <tr> <td>1/1</td> <td>1/1</td> <td>A</td> </tr> </table>	SCALE	SHEET	REV.	1/1	1/1	A
SCALE	SHEET	REV.							
1/1	1/1	A							

X.± 0.3	X°.± 5°
.X± 0.25	.X°.± 2°
.XX± 0.20	.XX°.± 1°
.XXX± 0.10	.XXX°.± 0.5°