



Rohs
Compliant




Pb

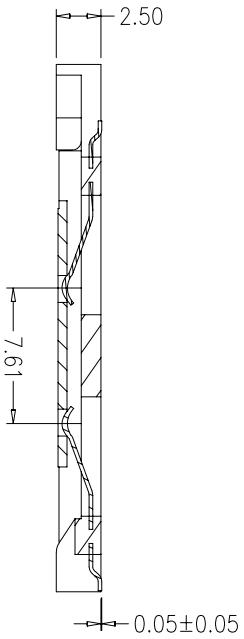

0.05 ± 0.05



- NOTES:
- 1.0 MAIN BODY PART MATERIAL INSULATOR: THERMOPLASTIC UL 94V-0 CONTACT TERMINAL: COPPER ALLOY SHELL: STAINLESS STEEL
 - 2.0 RATING:
 - 2.1 VOLTAGE:10 VAC (rms)
 - 2.2 OPERATION: 0.5 AMPERES MAX. PER CONTACT
 - 2.3 OPERATION TEMPERATURERANGE:-25°~+90°
 - 3.0 ELECTRIC CHARACTERISTIC:
 - 3.1 CONTACT RESISTANCE $\leq 100m$ MAX.
 - 3.2 INSULATION RESISTANCE: 1000M MIN.
 - 3.3 DIELECTRIC WITHSTANDING VOLTAGE:500V AC FOR 1 MINUTE
 - 4.0 OPERATION LIFE: 10000 CYCLES
 - 5.0 PLATING OF CONTACT: CONTACT AREA Au 5u" Min. TERMINATION AREA Gold Flash. UNDERPLATED NICKEL 50u"~100u" MIN.
 - 6.0 PACKING: TAPE&REEL

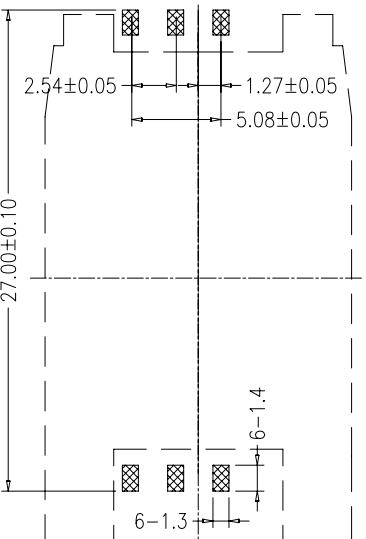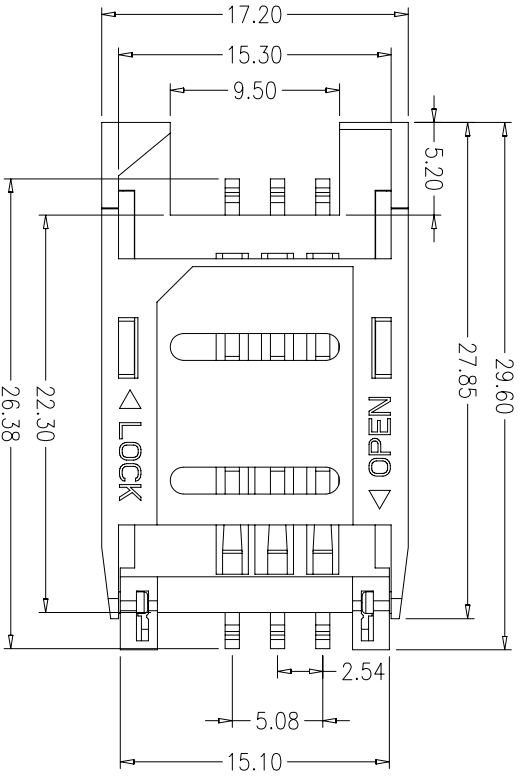

RECOMMENDE PCB LAYOUT
TOP VIEW(.XX±0.05)

REV.	ECN NO.	DESCRIPTION	DRAW	CHECK	APPD.	DATE
X0	ECN10012100X0	初版发行	leimeiqui	David	David	



未标示之一般公差: 0.00 ± 0.20

0.0 ± 0.25
 $0.\pm0.30$

UNITS	SCALE	REV.	SHEET	TITLE:
mm	1:1	X0	1 OF 1	mstconn 深圳市德瑞电子有限公司 SHENZHEN DERUI ELECTRONIC CO., LTD.
GENERAL TOLERANCE		DR.	leimeiqui	SIM-2.54-1新
0.	±0.35	CHK.		MATL
0.0	±0.35			SEE NOTES
0.00	±0.25	APPD.		FINISH
0°	$\pm4'$			SEE NOTES
0.0°	$\pm2'$			

DWG:NO. PART NO. A MSN47S050U-X0
DWG-SIM CARD-034

A B C D

1 2 3 4 5 6